


# RBM RINOXPLUS M & RINOXPLUSSMART M




RinoxPlus M

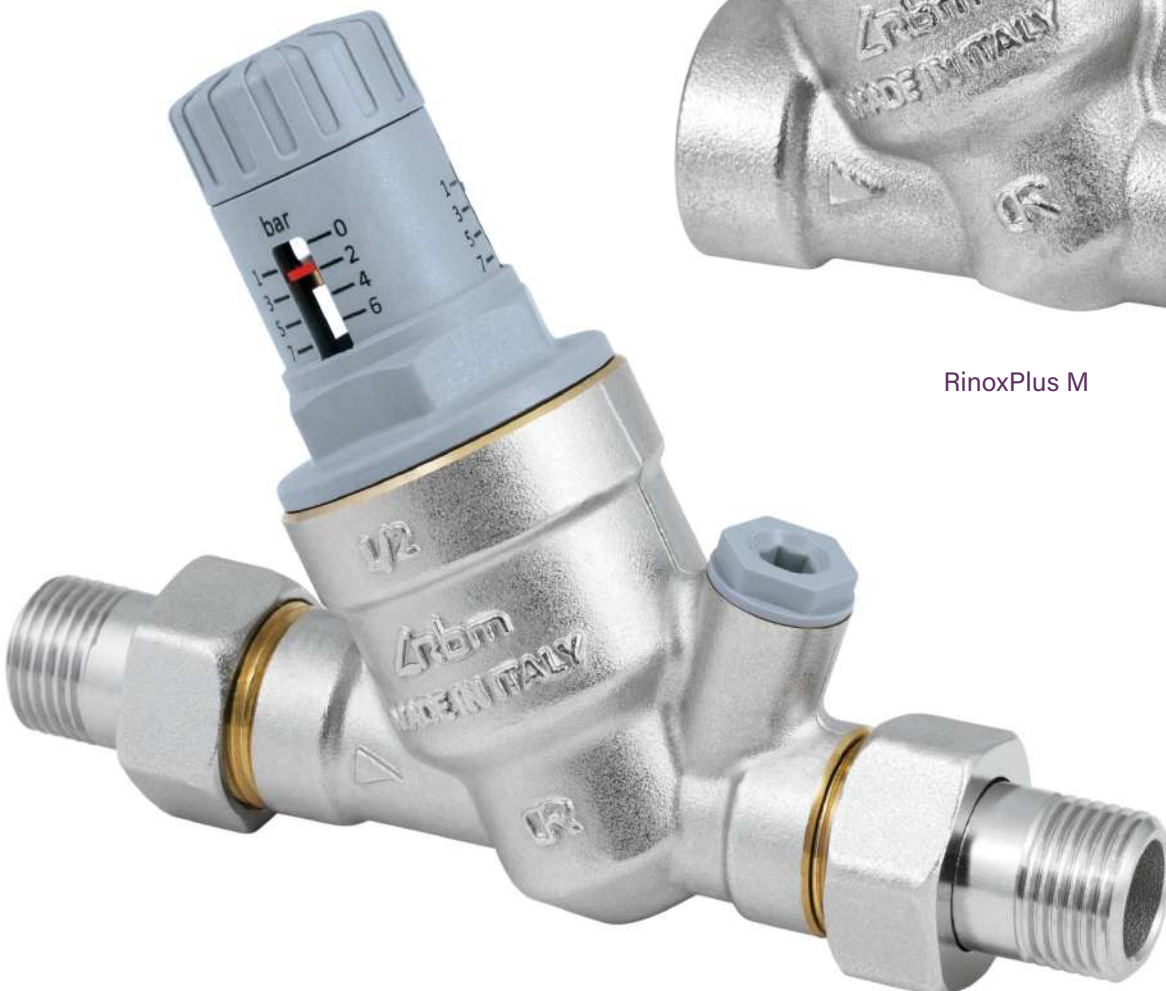

RinoxPlusSmart M

# DIAPHRAGM PRESSURE REDUCING VALVE

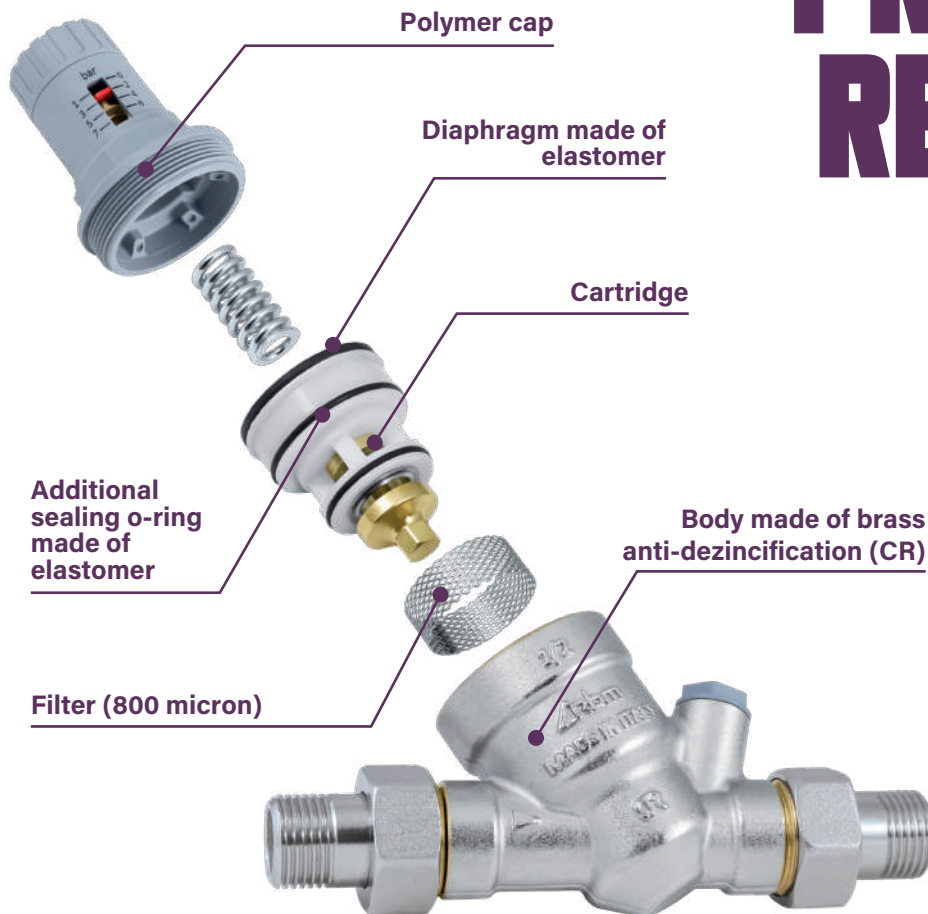

## DESCRIPTION

The RBM RinoxPlus M are diaphragm operated pressure reducing valves with inspectionable and easily interchangeable internal cartridge, complete with removable filter.

The cartridge is a compensated seat: upstream pressure variations do not affect the adjustment of the downstream pressure.

In addition, the RinoxPlusSmart M pressure reducing valve is equipped with a graduated knob to carry out the calibration, without the use of a pressure gauge and tools.

## MAINTENANCE INTERVENTIONS

Before carrying out any maintenance operation, shut off the pressure reducing valve. For the replacement, control and cleaning of the reducer, simply unscrew the cap and remove the internal cartridge, which contains all the mobile parts and consumables.

When the internal cartridge is replaced the reducer returns to as-new condition. It is possible to remove the filter from the cartridge to carry out cleaning or replacement.

During these operations, the body remains installed on the system.