




UTILITY COLLAR

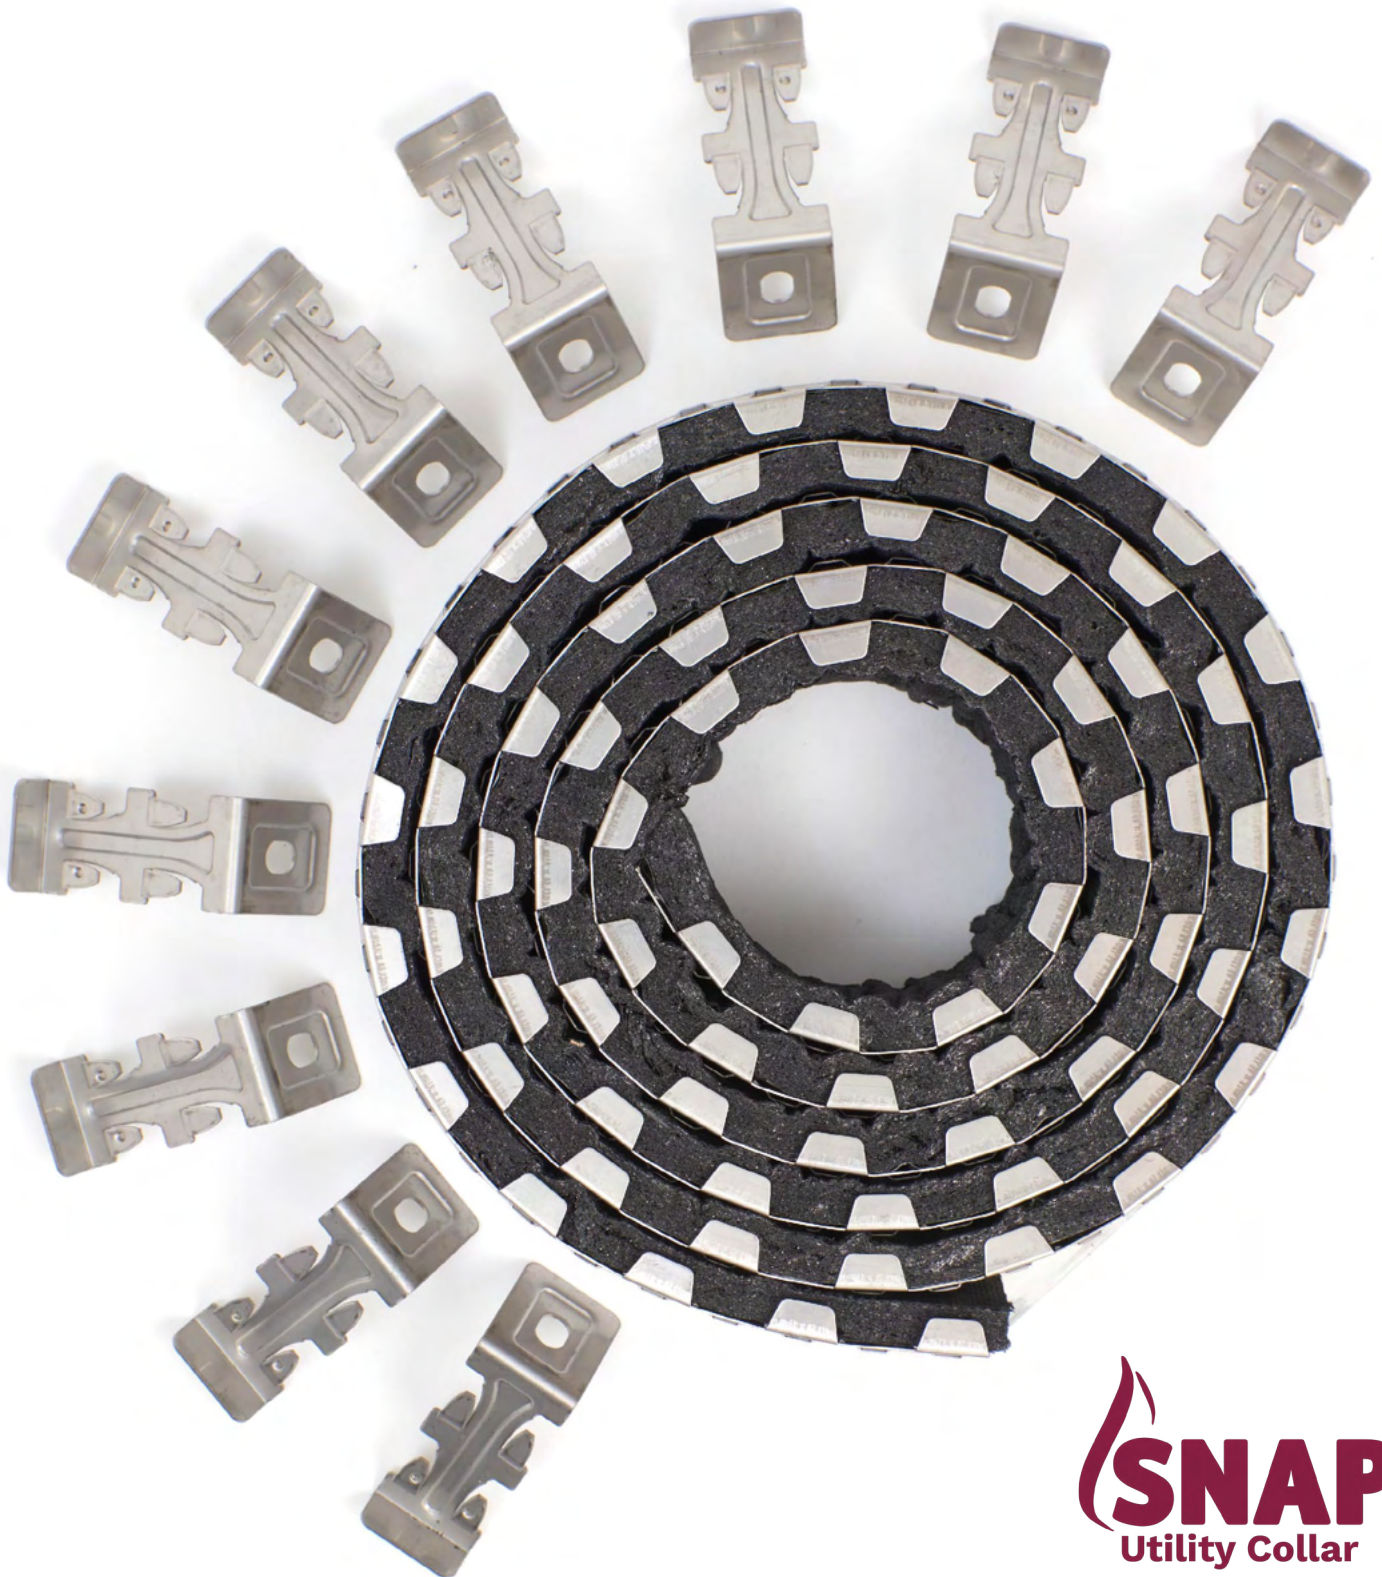

COMPLIANCE AND VERSATILITY

A COLLAR FOR OVER 500 APPLICATIONS. INDEPENDENTLY TESTED.

DESCRIPTION

The Utility Collar is a versatile continuous stainless-steel strip that can be cut to size to provide over 500 applications for slabs and walls.

KEY FEATURES

All major pipe types are covered:

- PVC
- PVC + Fitting
- HDPE
- Triplus
- Raupiano

Across a multitude of elements with FRLs up to -240/240:

- Concrete Slabs ($\geq 120, 150$ & 175mm)
- Bondek Slabs ($\geq 120, 150$ & 175mm)
- 90mm PB Wall (64mm stud, 1 x 13mm either side)
- 116mm PB Wall (64mm stud, 2 x 13mm either side)
- Concrete and Masonry walls ($\geq 116\text{mm}$)
- 75mm Hebel Powerpanel Wall (90 & 120 minute walls)
- 78mm SpeedPanel (patched with Fire-rated Plasterboard)
- Dincel walls - without removing the plastic (110 & 155mm)
- AFS Rediwall - without removing the plastic (110mm)
- AFS Logicwall - without removing fibre sheeting (110mm)

Special features:

- Collar can be painted apart from the active area of the collar
- Collars can be installed min. 40mm separation – outer edge to outer edge of collar casing

